

URANO PU



+60° C


-25° C

Tubo in PVC grigio con sottostrato in TPU antiabrasivo color rosso e spirale di rinforzo in PVC rigido antiurto. Superficie interna liscia, esterna semi liscia, molto robusto e indicato per impieghi gravosi. La versione antistatica (disponibile su richiesta) viene prodotta con filo di acciaio ottonato inserito nella parete plastica per rispondere ancora meglio alle esigenze di resistenza all'abrasione anche sull'esterno.

- Industria, edilizia: aspirazione e mandata di materiale abrasivo (fanghiglia, sabbia, cemento, ghiaietto).

Grey PVC hose with a completely antiabrasive Polyurethane tube, reinforced with an anti-shock rigid PVC spiral. Smooth inside, outside slightly corrugated; very strong structure, it is very appreciated in heavy duty applications where an excellent resistance to abrasion is required. The hose can be manufactured (upon request) in the antistatic version, with a brass steel wire inside the plastic wall, to meet still better the abrasion resistance requirements even on the external surface.

- Suction and delivery of abrasive materials such as sand, cement, gravels, stones.

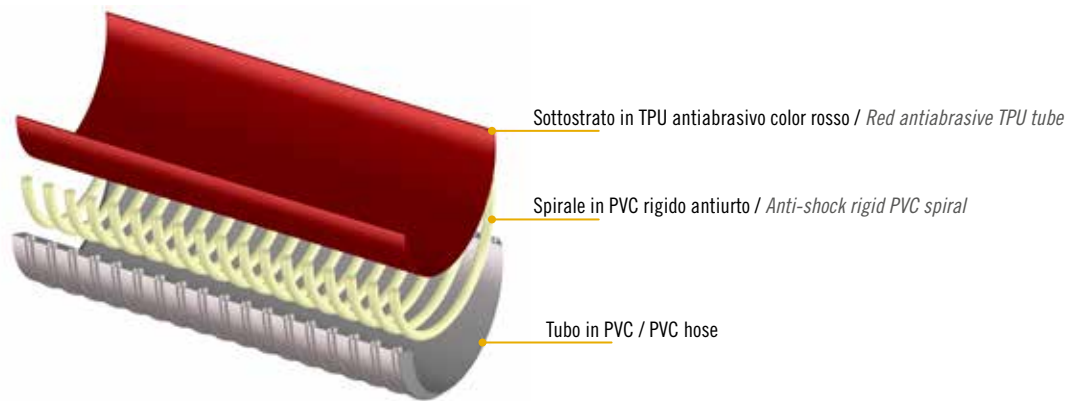

Scheda tecnica / Technical data

Codice	Ø Int.	Spess. Min.	Spess. Max.	Peso	P.E.	P.S.	Depr.	R. Curvatura	Lg. Rotolo	Vol.
Code	Ø Int.	Min wall th.	Max wall th.	Weight	WP	BP	Vac.	Bending	Coil lgth.	Vol.
	mm	mm	mm	g/m	bar	bar	m H ₂ O	mm	m	m ³
UR 01 038.0 000.0	38,1*	3,9	4,6	680	5,0	15	10	155	50	0,182
UR 01 040.0 000.0	40*	3,9	4,6	710	5,0	15	10	160	50	0,190
UR 01 045.0 000.0	45*	4,0	4,7	830	4,0	12	10	180	50	0,316
UR 01 050.0 000.0	50*	4,3	5,0	970	4,0	12	9	200	50	0,348
UR 01 052.0 000.0	50,8	4,3	5,0	990	4,0	12	9	200	50	0,353
UR 01 060.0 000.0	60*	4,5	5,3	1230	4,0	12	9	240	50	0,409
UR 01 063.0 000.0	63,5*	4,7	5,5	1360	4,0	12	9	260	50	0,539
UR 01 070.0 000.0	70*	5,0	5,9	1570	3,0	9	9	280	50	0,592
UR 01 076.0 000.0	76	4,9	5,8	1690	3,0	9	9	310	50	0,761
UR 01 080.0 000.0	80*	5,1	6,0	1790	3,0	9	9	320	50	0,710
UR 01 090.0 000.0	90	5,3	6,2	2090	3,0	9	9	360	30	0,526
UR 01 100.0 000.0	100*	6,0	7,0	2650	3,0	9	8,5	410	30	0,880
UR 01 102.0 000.0	102	6,0	7,0	2700	3,0	9	8,5	410	30	0,895
UR 01 110.0 000.0	110*	6,1	7,1	2930	3,0	9	8,5	450	30	0,958
UR 01 120.0 000.0	120*	6,2	7,3	3270	2,5	7,5	8	480	30	1,384
UR 01 127.0 000.0	127*	6,3	7,4	3510	2,5	7,5	8	510	30	1,458
UR 01 152.0 000.0	152,4	6,7	8,6	4730	2,0	6	8	610	20	1,362

*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite / *Available on request, contact our sales office for more info and quantities

I dati tecnici qui riportati sono stati misurati a 23°C e al 50% di umidità / The technical data here reported were measured at 23°C with 50% humidity