



VULCANO PU M AF

Temperature range: -40°C +90°C


Flexible hose made with flame retardant ether-based Polyurethane reinforced with steel spiral. It is very resistant to abrasion and it is very flexible for extreme bending sessions.

Wall thickness from 0,4 to 0,75 mm

Compressible (4:1)

The hose becomes conductive by earthing the spiral

Applications: Ideal solution for suction of shaving abrasive powders, medium-sized abrasive granule woodworking and industrial fields in general

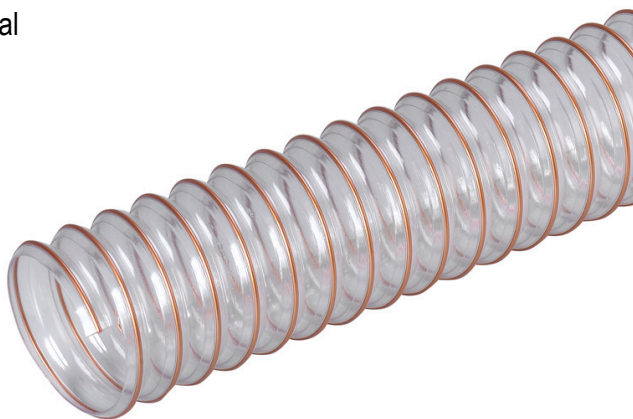

Technical data

Part number	Ins.Ø	Min. wall thick.	Max wall thick.	Weight	Vacuum	Bending radius	Coil lgth.	Volume
	mm	mm	mm	g/m	mm	mm	m H2O	mm
FM 01 080.0 000.0	80	2,3	0,45	525	65	1,6	20	0,254
FM 01 100.0 000.0	100	2,5	0,55	615	85	1,3	15	0,281
FM 01 127.0 000.0	127	2,9	0,65	825	105	1,0	15	0,405
FM 01 150.0 000.0	150	2,9	0,65	1005	125	0,8	15	0,537
FM 01 250.0 000.0	250	3,3	0,65	2060	210	0,4	10	1,179
FM 01 300.0 000.0	300	3,3	0,65	2535	250	0,3	10	1,608

The technical data here reported were measured at 23°C with 50% humidity

The info given by IPL are based on the best knowledge but do not exempt the client to carry out controls on IPL's products in order to estimate the real technical suitability for the intended application.

We reserve the right to alter products specifications without prior notice