


P9/A/BL

PUCON 2LR/6 LB13 U0/U03A AS FA

KD2LB1302

## TECHNICAL INFORMATION

	IMPERIAL	METRIC
<b>Max Production Width</b>	125.98in	3200mm
<b>Total Thickness</b>	0.05in	1.3mm
<b>Mass</b>	0.29lb/ft <sup>2</sup>	1.42kg/m <sup>2</sup>
<b>Pull Per 1%</b>	34lb/in	6N/mm
<b>Working Temp.</b>	-13/+194F <sup>o</sup>	-25/+90C <sup>o</sup>
<b>Flexion (A)</b>	0.24in 6mm	
<b>Counter Flexion (B)</b>	0.31in 8mm	

## BEST USED FOR


### GENERAL CHARACTERISTICS

2 ply blue PU, knife edge rated, FDA and antistatic

## SPECIAL CHARACTERISTICS

Antistatic	YES	High Conductive	NO	Abrasion Resistant	NO
Food Approved	YES	Flame Retardant	NO	Tear Resistant	NO
ATEX Certified	NO	Pyrolysis Resistant	NO	Hydrolysis Resistant	NO
Antimicrobial Protection	NO	Low Noise	NO	Oil & Fat Resistant	YES

## BELT CONSTRUCTION INFORMATION

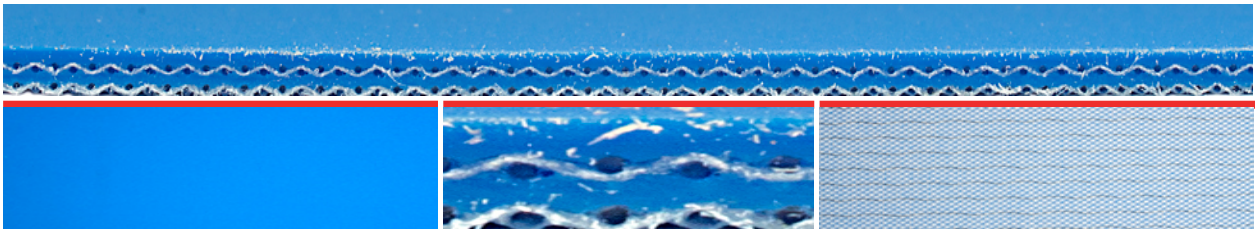


TOP SIDE (Carrying)		CARCASS	BOTTOM SIDE (Pulley)		
<b>Material</b>	PU	<b>Interply</b>	PU	<b>Material</b>	Fabric
<b>Color</b>	Light Blue (LB)	<b>Fabric</b>	Light Rigid (LR)	<b>Color</b>	Fabric (FA)
<b>Thickness</b>	0.01in 0.3mm	<b>Plies</b>	2	<b>Thickness</b>	0in 0mm
<b>Hardness</b>	92 Shore A	<b>Weft</b>	Rigid (R)	<b>Hardness</b>	-
<b>Surface</b>	Smooth - Matte (A)			<b>Surface</b>	PU Impregnated (U0)

P9/A/BL

PUCON 2LR/6 LB13 U0/U03A AS FA

KD2LB1302

### SPLICE INSTRUCTIONS (Preferred)

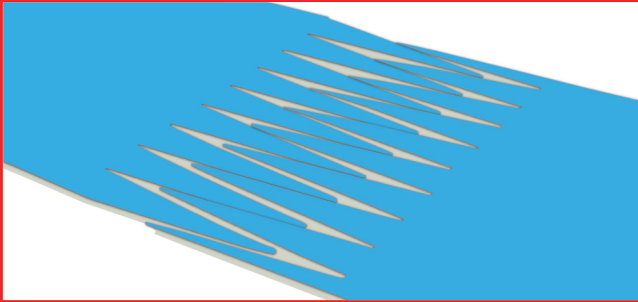

### STRAIGHT FINGERS (SF)



	WATER COOL	AIR COOL
<p><b>Temperature:</b> 160 C° 320 F°</p> <p><b>Pressure:</b> 29 PSI 2 Bars</p>	<p>160 C° 320 F°</p> <p>7.3 PSI 0.5 Bars</p>	<p>160 C° 320 F°</p> <p>7.3 PSI 0.5 Bars</p>
<p>• <b>Release Paper</b></p> <p>• <b>Foil</b></p> <p>• <b>Belt</b> (Conveying Side Up)</p> <p>• <b>Release Paper</b></p>		
<p><b>Temperature:</b> 160 C° 320 F°</p> <p><b>Pressure:</b> 29 PSI 2 Bars</p> <p><b>Dwell Time:</b> 0 Min</p>	<p>160 C° 320 F°</p> <p>7.3 PSI 0.5 Bars</p> <p>2 Min</p>	
<p>Note: Foil is optional for air cooled.</p>		

### MECHANICAL JOINING METHOD

	<b>Recessed Lacing</b>	NO
	<b>Hidden Lacing</b>	NO
	<b>Staple Lacing</b>	-
	<b>Plastic Spiral Lacing</b>	YES
	<b>Spiral Finger</b>	YES
	<b>APF Fasteners</b>	APF-100
	<b>Alligator</b>	00
	<b>Clipper Lacing</b>	25, UCM36SL XSP, UCM36 XSP, 30

### FRICITION COEFFICIENT (Bottom Side)

<b>Stainless Steel, BA</b> (Brilliant Surface)	0.25
<b>Stainless Steel, 2B</b> (Half-Brilliant Surface)	0.25
<b>Stainless Steel, 2D</b> (Hot-Laminated Surface)	0.29
<b>Rolled Steel Plate</b>	0.25
<b>Plastic Sheet</b> (Brilliant Surface)	0.25

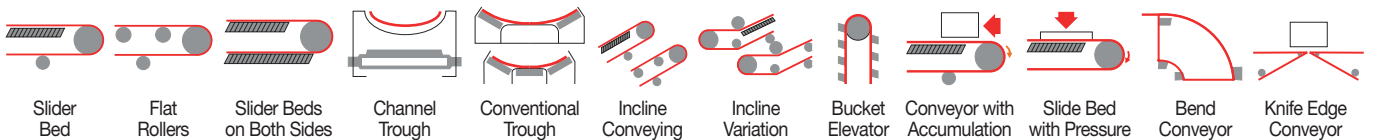

● Applicable ◐ Limited Use ○ Not Applicable

**WARNING:** This product can expose you to chemicals including titanium dioxide, which is known to the State of California to cause cancer or birth defects or other reproductive harm. For more information visit [www.P65WARNINGS.ca.gov](http://www.P65WARNINGS.ca.gov)

info-sampla@megadynegroup.com

www.megadyneamericas.com