


SPECIFICATION SHEET

Name of Product : **RIB POLYPROPYLENE MAT**

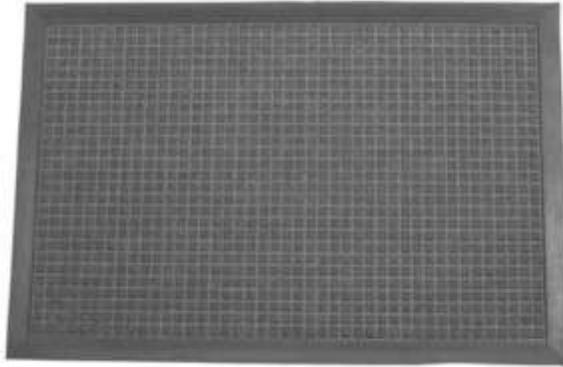

Specification	: 100% Rubber Backing with Polypropylene fabric insert
Manufacturing Method	: Rubber Molding in heavy hydraulic press under high temperature
Colour	: Black, Grey, Blue, Breen, Red, Anthracite
Type	: Soft PP face with Solid Heavy duty rubber backing
Compound	: NR mixed with SBR (for backing)
Hardness (Shore A)	: 70° +/- 5°
Density (SG)	: 1.25
Min. Temperature	: -30
Tensile Strength MPa	: 4
Properties	: Anti-slip
Thickness	: 8 mm
Sizes	: 40x60, 45x75, 60x90, 80x120, 90x150 cm,
Tolerance Limit	: +/- 5% on general values
Applications	: Shall be used for a multitude of Industrial, Retail and Domestic applications which include wet area ground stabilization, wet area machine and person station areas, wet processing plants and door entrances.
Features	: Excellent and High ground stabilization Good anti-fatigue characteristics, High impact resistance, Anti-slip finish, Low Maintenance.
Packing	: Palletized / bale packing
Cleaning	: Sweep, Vacuum
Storage Instructions	: Keep well wrapped in a dry place to avoid fungal infections, Store with dry silica gel, if infected with Fungus clean with Silicon.