

MULTI-PURPOSE REINFORCED PVC HOSE

CX Series



A high quality, exceptionally flexible PVC hose borne out of technical innovation and superior quality materials that now stands a firm favourite for industrial use. Lightweight, its ergonomic design reduces operator fatigue and associated strains, helping to improve overall productivity without compromising on performance and durability.

Key Features:

- Extremely flexible.
- Lightweight and user-friendly.
- Excellent kink-resistance.
- RoHS 3 compliant.
- High resistance to acids and alkalis.
- Good abrasion resistance.
- Silicone-free.
- Service temperature -15°C to +60°C.
- Conforms to ISO 5774.
- 4:1 safety factor at +20°C.

Sizes:

Available in 30m coils
6.3mm – 19mm ID

Colours:

Black
Blue

Other colours and sizes available against minimum order quantity



1. Phthalate free PVC
2. Polyester fiber reinforcement
3. Phthalate free PVC outer




Applications:

- Air/water supply
- Production lines
- Pneumatic tools



Product Ref	Internal Diameter	External Diameter	Maximum Working Pressure	Minimum Burst Pressure	Weight per Metre	Bend Radius
CX06	6.3mm	10.5mm	18 Bar	72 Bar	0.074 Kg	28mm
CX08	8mm	12.5mm	15 Bar	60 Bar	0.105 Kg	29mm
CX10	9.75mm	13.75mm	13 Bar	52 Bar	0.105 Kg	40mm
CX12	12mm	17mm	11 Bar	44 Bar	0.167 Kg	55mm
CX16	16mm	21.5mm	11 Bar	44 Bar	0.233 Kg	95mm
CX19	19mm	24.5mm	11 Bar	44 Bar	0.268 Kg	135mm

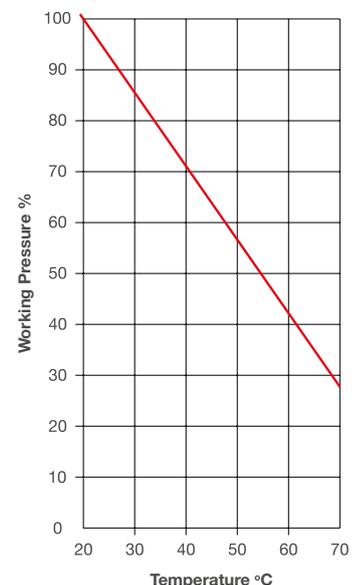

Max. recommended continuous working temperature = 60°C