



NYLON (SLEEVE HOOK AND LOOP)

TEXWRAP is a foldable sleeve made of polyamide fibers coated on one side with UV-resistant PU. The exclusive locking system, made of highly resistant VCO (Velcro) allows to obtain a tubular protection of endless length and easy to assemble.

TEXWRAP can be supplied in customized versions: cut to size and stitched, with the addition of eyelets and locking catch to improve tear resistance.

Standard colour: Black
Other colours are available on request

Temperature range:


-40° C to +180°C
(-40° F to +356° F)

- MSHA approval for mining applications n. IC207/02
- Volume resistivity (applied voltage 500V) $\Omega \cdot m$ $5.9 \cdot 10^{12}$ according to CEI 15-23
- Surface resistivity (applied voltage 500V) Ω $1.4 \cdot 10^{16}$ according to CEI 15-23

TEXWRAP is available in the following range:

Part Nr.	Round diameter [mm]	Coil length [m]	Quantity per box [m]	Availability
TEXW03516A4	35	50	150	Stock
TEXW04016A4	40	50	150	Stock
TEXW05016A4	50	50	150	Stock
TEXW06016A4	60	50	100	Stock
TEXW07516A4	75	50	100	Stock
TEXW08016A4	80	50	100	Stock
TEXW10016A4	100	50	50	Stock
TEXW12516A4	125	50	50	Stock
TEXW15016A4	150	50	50	Stock
TEXW17516A4	175	50	50	Stock
TEXW20016A4	200	50	50	Stock

Rolls of 50 m

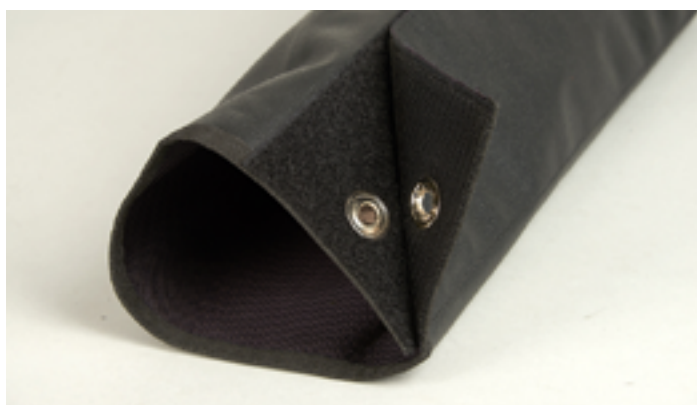

Example of customized version with eyelets